

Duro-Guard® EPS Insulation

PRODUCTS

Duro-Guard EPS Type VIII

- Rigid roof insulation panel composed of closed cell expanded polystyrene.
- Applications include single-ply roofing systems, standing seam metal roof systems, modified bitumen systems, and BUR.
- Available with polyester facer or FR10.
- Provides R-values from 4.25 to 8.3.
- Available in flat or tapered panels.

Duro-Guard EPS Type II

- Rigid roof insulation panel composed of closed cell expanded polystyrene.
- Applications include single-ply roofing systems, standing seam metal roof systems, modified bitumen systems, and BUR.
- Available with polyester facer or FR10.
- Provides R-values from 4.55 to 8.3.
- Available in bevel or straight cut flute filler.
- Available in flat or tapered panels.

Duro-Guard EPS Fan Fold

- Rigid roof insulation panel composed of closed cell expanded polystyrene laminated between facers.
- For use with single-ply roofing systems.

Duro-Guard EPS Fiberglass Facer


- Closed cell expanded polystyrene roof insulation that is laminated to a fiberglass facer.
- Applications include single-ply roofing systems, modified bitumen systems, and BUR.
- Factory-laminated facer saves labor time and reduces overall project costs when incorporated into a roofing system that requires a slip sheet.
- Available in flat or tapered panels.

Fiberglass Facer Flute Filler Combo Board

- Cut to fit any profile
- Min thickness above the rib 1.5" max thickness 5"
- Densities: 1.25", 1.5", or 2.0"
- Facers available: Polyester or FR10

Warranty

Duro-Guard® insulation products, when used with Duro-Last Roofing Systems®, can allow industry leading edge-to-edge, top to bottom warranty coverage.

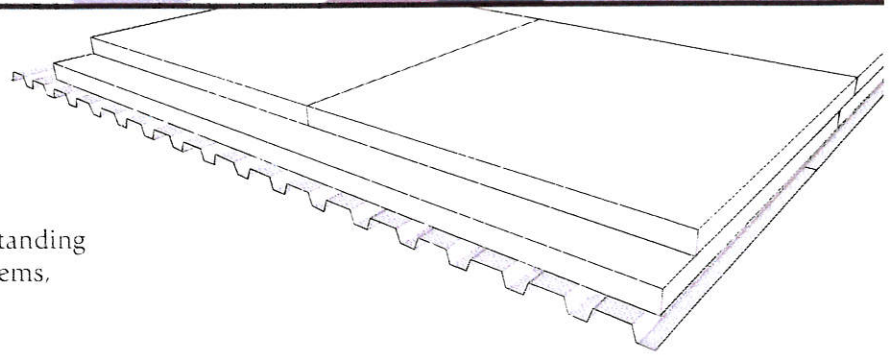

Duro-Guard HD ISO + EPS

- Composite insulation consisting of a closed cell expanded polystyrene bonded to high-density polyisocyanurate cover board.
- Applications include single-ply roofing systems, modified bitumen systems, and BUR. Can also be used as an underlayment for metal roofing systems over a fully supported structural deck.
- Ideal for commercial roofing projects that require high thermal efficiency combined with maximum durability.
- Provides R-values from 6.35 to 25.44.
- Available in flat or tapered panels.

Duro-Guard EPS Nail Base

- Composite insulation consisting of a closed cell expanded polystyrene bonded to an oriented strand board (OSB) or plywood.
- Applications include single-ply roofing systems, modified bitumen systems, and BUR. Can also be used as an underlayment for shingle, tile, slate, and metal roofing systems over a fully supported structural deck.
- Provides both insulation and a nailable substrate.
- Provides R-values from 6.4 to 47.5.

Potential LEED® Credits

Energy and Atmosphere

- Minimum Energy Performance
- Optimize Energy Performance

Materials and Resources

- Building Reuse
- Construction Waste Management
- Recycled Content
- Local and Regional Materials

Innovation and Design